

## Biresin® CR170 and Biresin® CH150-3 Hardener

### Composite resin system

#### Product Description

Biresin® CR170 resin (A) cured with Biresin® CH150-3 hardener (B) is an epoxy resin system suitable for the production of high performance fibre reinforced components by the RTM process.

#### Areas of Application

Biresin® CR170/CH150-3 is especially suited to injection processes due to its viscosity range and reactivity. It can be used in areas where short cycle times are required, perhaps in the production of automotive parts.

#### Features / Advantages

- Reduced cycle times for RTM processing are possible with this resin system especially where dynamic curing cycles are used.
- Glass transition temperatures up to 143°C are possible depending on cure conditions

Physical Data		Resin (A)	Hardener (B)
<b>Individual Components</b>		<b>Biresin® CR170</b>	<b>Biresin® CH150-3</b>
Mixing Ratio, parts by	<b>Weight</b>	100	24
Mixing Ratio, parts by	<b>Volume</b>	100	29
Colour		translucent	colourless
Viscosity, 25°C	mPa.s	~13,000	~20
Density, 25°C	g/ml	1.14	0.94
		<b>Mixture</b>	
Potlife, 100 g / RT, approx. values	min	60	
Mixed viscosity, 25°C, approx.	mPa.s	1,600	
Mixed viscosity, 60°C, approx.	mPa.s	160	
Mixed viscosity, 80°C, approx.	mPa.s	90	


#### Processing and processing properties

- The material and processing temperatures should be in the range 18 - 35°C.
- The mixing ratio must be followed accurately to obtain best results. Deviating from the correct mix ratio will lead to lower performance.
- Before demoulding precuring of at least 2 h at 60°C is recommended.
- The final mechanical and thermal values are dependent on the applied postcuring cycles.
- It is recommended to clean brushes or tools immediately after use with Sika Reinigungsmittel 5.
- Additional information is available in "Processing Instructions for Composite Resins".

Typical Mechanical Properties of Fully Cured Neat Resin			
Biresin® CR170 resin (A)	with hardener (B)		Biresin® CH150-3
Tensile strength	ISO 527	MPa	87
Tensile E-Modulus	ISO 527	MPa	2,700
Elongation at break	ISO 527	%	6.6
Flexural strength	ISO 178	MPa	133
Flexural E-Modulus	ISO 178	MPa	2,800
Compressive Strength	ISO 604	MPa	120
Density	ISO 1183	g/cm <sup>3</sup>	1.15
Shore hardness	ISO 868	-	D 84
Impact resistance	ISO 179	kJ/m <sup>2</sup>	42

Typical Thermal Properties of Cured Neat Resin (approx. values after 4 h / 140°C)			
Biresin® CR170 resin (A)	with hardener (B)		Biresin® CH150-3
Heat distortion temperature	ISO 75B	°C	139
Glass transition temperature	ISO 11357	°C	143

**Glass Transition Temperature vs. Cure Cycle**

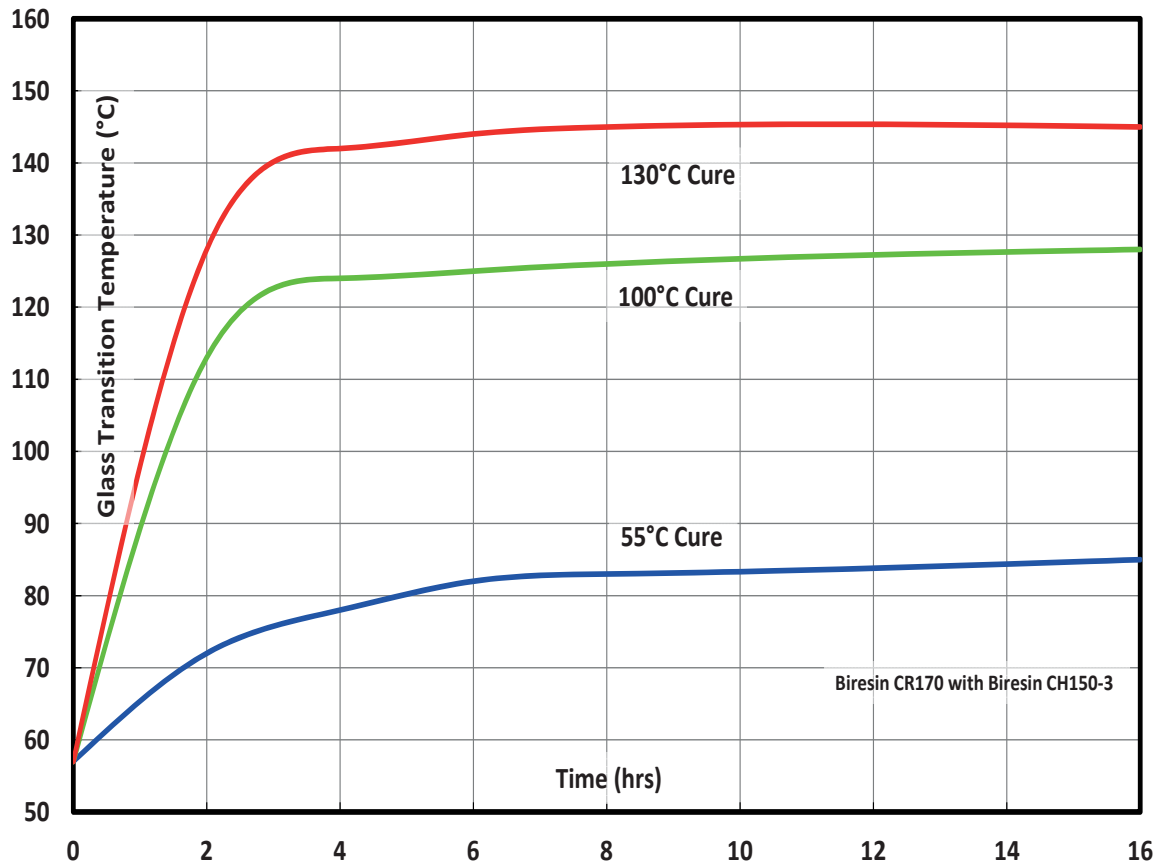

When curing a composite part, the whole of the part (including the very middle of the laminate) needs to see the cure temperature.

### Packaging (net weight, kg)

Biresin® CR170 resin (A)	1,000	200		10
Biresin® CH150-3 hardener (B)	900	180	20	2.4

### Storage

- Minimum shelf life of Biresin® CR170 resin (A) is 24 month and of Biresin® CH150-3 hardener (B) is 12 month under room conditions (18 - 25°C), when stored in original unopened containers.
- After prolonged storage crystallisation of resin (A) may occur. This is easily removed by warming up for a sufficient time at a minimum of 60°C.
- Containers must be closed tightly immediately after use to prevent moisture ingress. The residual material needs to be used up as soon as possible.

### Health and Safety Information

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety related data.

### Disposal considerations

Product Recommendations: Must be disposed of in a special waste disposal unit in accordance with the corresponding regulations.

Packaging Recommendations: Completely emptied packagings can be given for recycling. Packaging that cannot be cleaned should be disposed of as product waste.

### Value Bases

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

### Legal Notice

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Further information available at:

Sika Deutschland GmbH  
Subsidiary Bad Urach  
Stuttgarter Str. 139  
D - 72574 Bad Urach  
Germany

Tel: +49 (0) 7125 940 492  
Fax: +49 (0) 7125 940 401  
Email: [tooling@de.sika.com](mailto:tooling@de.sika.com)  
Internet: [www.sika.com](http://www.sika.com)

